Chapter 5. Joint Probability Distributions and Random Samples

Math 3670 Summer 2024

Georgia Institute of Technology

Section 1. Jointly Distributed Random

Variables

Definition

Let X and Y be two discrete RVs defined on the sample space $\mathcal S$ of an experiment.

The joint probability mass function p(x, y) is defined by

$$p(x,y) =$$

The joint PMF satisfies

- 1. $p(x, y) \ge$
- 2. $\sum_{x,y} p(x,y) =$
- 3. $\mathbb{P}((X, Y) \in A) =$

1

Example

A large insurance agency services a number of customers who have purchased both a homeowner's policy and an automobile policy from the agency. For an automobile policy, the choices are \$100 and \$250, whereas for a homeowner's policy, the choices are 0, \$100, and \$200.

Suppose an individual with both types of policy is selected at random from the agency's files. Let X be deductible amount on the auto policy and Y deductible amount on the homeowner's policy.

	0	100	200
100	0.2	0.1	0.2
250	0.05	0.15	0.3

2

Definition

The marginal probability mass function of X is given by

$$p_X(x) :=$$

Example

A large insurance agency services a number of customers who have purchased both a homeowner's policy and an automobile policy from the agency. For an automobile policy, the choices are \$100 and \$250, whereas for a homeowner's policy, the choices are 0, \$100, and \$200.

Suppose an individual with both types of policy is selected at random from the agency's files. Let X be deductible amount on the auto policy and Y deductible amount on the homeowner's policy.

	0	100	200
100	0.2	0.1	0.2
250	0.05	0.15	0.3

4

Definition

Let X and Y be two continuous RVs.

The joint probability density function f(x, y) is defined by

$$f(x, y) =$$

The joint PDF satisfies

- 1. $f(x, y) \ge$
- 2. $\int f(x, y) =$
- 3. $\mathbb{P}((X, Y) \in A) =$

Example

A bank operates both a drive-up facility and a walk-up window.

On a randomly selected day, let *X* be the proportion of time that the drive-up facility is in use (at least one customer is being served or waiting to be served) and *Y* the proportion of time that the walk-up window is in use.

The joint PDF is given by

$$f(x,y) = \begin{cases} \frac{6}{5}(x+y^2), & 0 \le x, y \le 1\\ 0 & \text{otherwise.} \end{cases}$$

Find $\mathbb{P}(0 \le X \le \frac{1}{4}, 0 \le Y \le \frac{1}{4}).$

Definition

The marginal probability density function of X is given by

$$p_X(x) :=$$

Example

A bank operates both a drive-up facility and a walk-up window.

On a randomly selected day, let *X* be the proportion of time that the drive-up facility is in use (at least one customer is being served or waiting to be served) and *Y* the proportion of time that the walk-up window is in use.

The joint PDF is given by

$$f(x,y) = \begin{cases} \frac{6}{5}(x+y^2), & 0 \le x, y \le 1\\ 0 & \text{otherwise.} \end{cases}$$

Find the marginal PDFs.

Example

The joint PDF is given by

$$f(x,y) = \begin{cases} 24xy, & 0 \le x \le 1, 0 \le y \le 1, x+y \le 1\\ 0 & \text{otherwise.} \end{cases}$$

Find the marginal PDFs and $\mathbb{P}(X + Y \le 1/2)$.

9

Definition

Two random variables X and Y are said to be **independent** if

Example

The joint PDF is given by

$$f(x,y) = \begin{cases} 24xy, & 0 \le x \le 1, 0 \le y \le 1, x+y \le 1\\ 0 & \text{otherwise.} \end{cases}$$

Are X and Y independent?

Example

Suppose that the lifetimes of two components are independent of one another and that the first lifetime, X_1 , has an exponential distribution with parameter λ_1 , whereas the second, X_2 , has an exponential distribution with parameter λ_2 .

Find the joint PDF.

Definition

The random variables X_1, X_2, \dots, X_n are said to be **independent** if

Conditional Distributions

Definition

Let X and Y be two continuous RVs with joint PDF f(x, y).

Then for any x for which $f_X(x) > 0$, the conditional probability density function of Y given that X = x is

Conditional Distributions

Example

A bank operates both a drive-up facility and a walk-up window.

On a randomly selected day, let *X* be the proportion of time that the drive-up facility is in use (at least one customer is being served or waiting to be served) and *Y* the proportion of time that the walk-up window is in use.

The joint PDF is given by

$$f(x,y) = \begin{cases} \frac{6}{5}(x+y^2), & 0 \le x, y \le 1\\ 0 & \text{otherwise.} \end{cases}$$

Find the conditional PDF of Y given X = 0.8.

Compute $\mathbb{P}(Y \le 0.5 | X = 0.8)$.

Exercise

(5.1-12) Two components of a minicomputer have the following joint PDF for their useful lifetimes X and Y:

$$f(x,y) = \begin{cases} xe^{-x(y+1)}, & x \ge 0, y \ge 0, \\ 0 & \text{otherwise.} \end{cases}$$

- 1. What is the probability that the lifetime X of the first component exceeds 3?
- 2. What are the marginal PDFs of X and Y? Are the two lifetimes independent? Explain.
- 3. What is the probability that the lifetime of at least one component exceeds 3?

Section 2. Expected Values, Covariance, and

Correlation

Expectation of a Function of Two Random Variables

Proposition

Let X and Y be jointly distributed RVs with PMF p(x, y) or PDF f(x, y) according to whether the variables are discrete or continuous.

Let h(x, y) be a function of two variables, then we can define a new random variable Z = h(X, Y).

The expectation of Z is

$$\mathbb{E}[Z] = \mathbb{E}[h(X,Y)] =$$

Expectation of a Function of Two Random Variables

Example

Five friends have purchased tickets to a certain concert.

If the tickets are for seats 1–5 in a particular row and the tickets are randomly distributed among the five, what is the expected number of seats separating any particular two of the five?

Let X and Y denote the seat numbers of the first and second individuals, respectively.

Expectation of a Function of Two Random Variables

Example

The joint PDF is given by

$$f(x,y) = \begin{cases} 24xy, & 0 \le x \le 1, 0 \le y \le 1, x+y \le 1\\ 0 & \text{otherwise.} \end{cases}$$

Find $\mathbb{E}[XY]$.

Covariance

Definition

The covariance between two RVs X and Y is

$$Cov(X, Y) =$$

Covariance

Example

The joint PDF is given by

$$f(x,y) = \begin{cases} 24xy, & 0 \le x \le 1, 0 \le y \le 1, x+y \le 1\\ 0 & \text{otherwise.} \end{cases}$$

Find the covariance of X, Y.

Covariance

Proposition

$$Cov(X, Y) =$$

Correlation Coefficient

Definition

The correlation coefficient of X and Y is defined by

$$\operatorname{Corr}(X,Y) = \rho_{X,Y} = \rho =$$

Correlation Coefficient

Properties

1. For constants a, b, c, d,

$$Corr(aX + b, cX + d) =$$

- 2. $-1 \le Corr(X, Y) \le 1$
- 3. If X and Y are independent, then Corr(X, Y) = 0. The converse does not hold in general.
- 4. If Corr(X, Y) = 1, -1, then Y = aX + b for some a, b.

Correlation Coefficient

Example

The joint PMF is given by

$$p(x,y) = \begin{cases} \frac{1}{4}, & (x,y) = (-4,1), (4,-1), (2,2), (-2,-2) \\ 0 & \text{otherwise.} \end{cases}$$

Find the covariance and the correlation coefficient.

Exercise

(5.2-24) Six individuals, including A and B, take seats around a circular table in a completely random fashion.

Suppose the seats are numbered $1, 2, \dots, 6$.

Let X be A's seat number and Y B's seat number.

If A sends a written message around the table to B in the direction in which they are closest,

how many individuals (including A and B) would you expect to handle the message?

The Distribution of the Sample

Section 4.

Mean

Sample Mean

Definition

The RVs X_1, X_2, \dots, X_n are said to form a (simple) random sample of size n if

- 1. they are independent RVs, and
- 2. every X_i has the same probability distribution.

The sample mean is defined by

$$\overline{X} =$$

The sample total is defined by

$$T =$$

Sample Mean

Proposition

Let X_1, \dots, X_n be a random sample from a distribution with mean μ and variance σ^2 . Then,

$$\mathbb{E}[\overline{X}] =$$
 $\mathsf{Var}(\overline{X}) =$
 $\mathbb{E}[T] =$
 $\mathsf{Var}(T) =$

Sample Mean

Example

In a notched tensile fatigue test on a titanium specimen, the expected number of cycles to first acoustic emission (used to indicate crack initiation) is $\mu=28,000$, and the standard deviation of the number of cycles is $\sigma=5000$.

Let X_1, X_2, \dots, X_{25} be a random sample of size 25, where each X_i is the number of cycles on a different randomly selected specimen.

The Case of a Normal Population Distribution


Proposition

Let X_1, \dots, X_n be a random sample from a normal distribution with mean μ and variance σ^2 . Then,

 $\overline{X} \sim$

 $T \sim$

The Case of a Normal Population Distribution

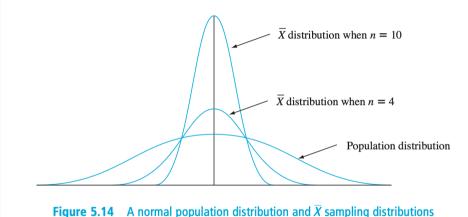

The Case of a Normal Population Distribution

Example

The time that it takes a randomly selected rat of a certain subspecies to find its way through a maze is a normally distributed RV with $\mu=$ 1.5 min and $\sigma=$.35 min.

Suppose five rats are selected.

Let $X1, \dots, X5$ denote their times in the maze.

Assuming the X_i 's to be a random sample from this normal distribution,

what is the probability that the total time is between 6 and 8 min?

The Central Limit Theorem

Theorem

Let X_1, X_2, \dots, X_n be a random sample from a distribution with mean μ and variance σ^2 .

If n is sufficiently large, \overline{X} and T have approximately normal distributions.

Rule of Thumb: If n = 30, the Central Limit Theorem can be used.

The Central Limit Theorem

Example

A certain consumer organization customarily reports the number of major defects for each new automobile that it tests.

Suppose the number of such defects for a certain model is a random variable with mean value 3.2 and standard deviation 2.4.

Among 100 randomly selected cars of this model, how likely is it that the sample average number of major defects exceeds 4?

The Central Limit Theorem

Normal approximation to Binomial

If $X \sim \text{Bin}(n, p)$ and n is large enough,

X and X/n have approximately normal distribution.

Exercise

(5.4-56) A binary communication channel transmits a sequence of "bits" (0s and 1s). Suppose that for any particular bit transmitted, there is a 10% chance of a transmission error (a 0 becoming a 1 or a 1 becoming a 0).

Assume that bit errors occur independently of one another.

- 1. Consider transmitting 1000 bits. What is the approximate probability that at most 125 transmission errors occur?
- Suppose the same 1000-bit message is sent two different times independently of one another.
 - What is the approximate probability that the number of errors in the first transmission is within 50 of the number of errors in the second?

Section 5. The Distribution of a Linear

Combination

Definition

Given a collection of n random variables $X1, \dots, X_n$ and constants a_1, \dots, a_n ,

$$Y = a_1X_1 + \cdots + a_n + X_n$$

is called a linear combination of the X_i 's.

Proposition

For a collection of *n* random variables $X1, \dots, X_n$ and constants a_1, \dots, a_n , consider

$$Y = a_1X_1 + \cdots + a_n + X_n.$$

Then,

$$\mathbb{E}[Y] =$$

$$Var(Y) =$$

In particular, if they are independent,

$$Var(Y) =$$

Example

A certain automobile manufacturer equips a particular model with either a six-cylinder engine or a four-cylinder engine.

Let X_1 and X_2 be fuel efficiencies for independently and randomly selected six-cylinder and four-cylinder cars, respectively, with

$$\mu_1 = 22, \qquad \mu_2 = 26, \qquad \sigma_1 = 1.2, \qquad , \sigma_2 = 1.5.$$

Find $\mathbb{E}[X_1 - X_2]$ and $Var(X_1 - X_2)$.

Proposition

If X_1, X_2, \dots, X_n are independent, normally distributed RVs (with possibly different means and/or variances), then any linear combination also has a normal distribution.

In particular, the difference $X_1 - X_2$ between two independent, normally distributed variables is itself normally distributed.

Exercise

(5.5-62) Manufacture of a certain component requires three different machining operations.

Machining time for each operation has a normal distribution, and the three times are independent of one another.

The mean values are 15, 30, and 20 min, respectively, and the standard deviations are 1, 2, and 1.5 min, respectively.

What is the probability that it takes at most 1 hour of machining time to produce a randomly selected component?